

FIG. 1


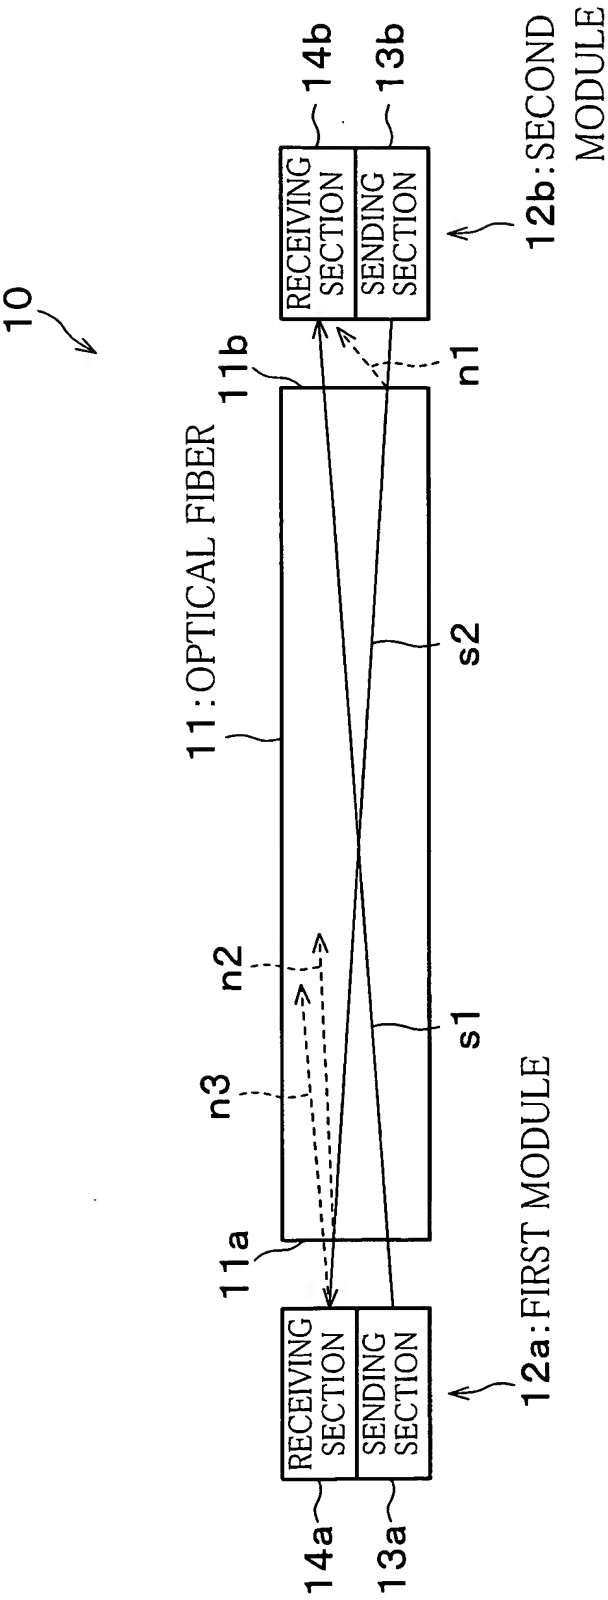


FIG. 2

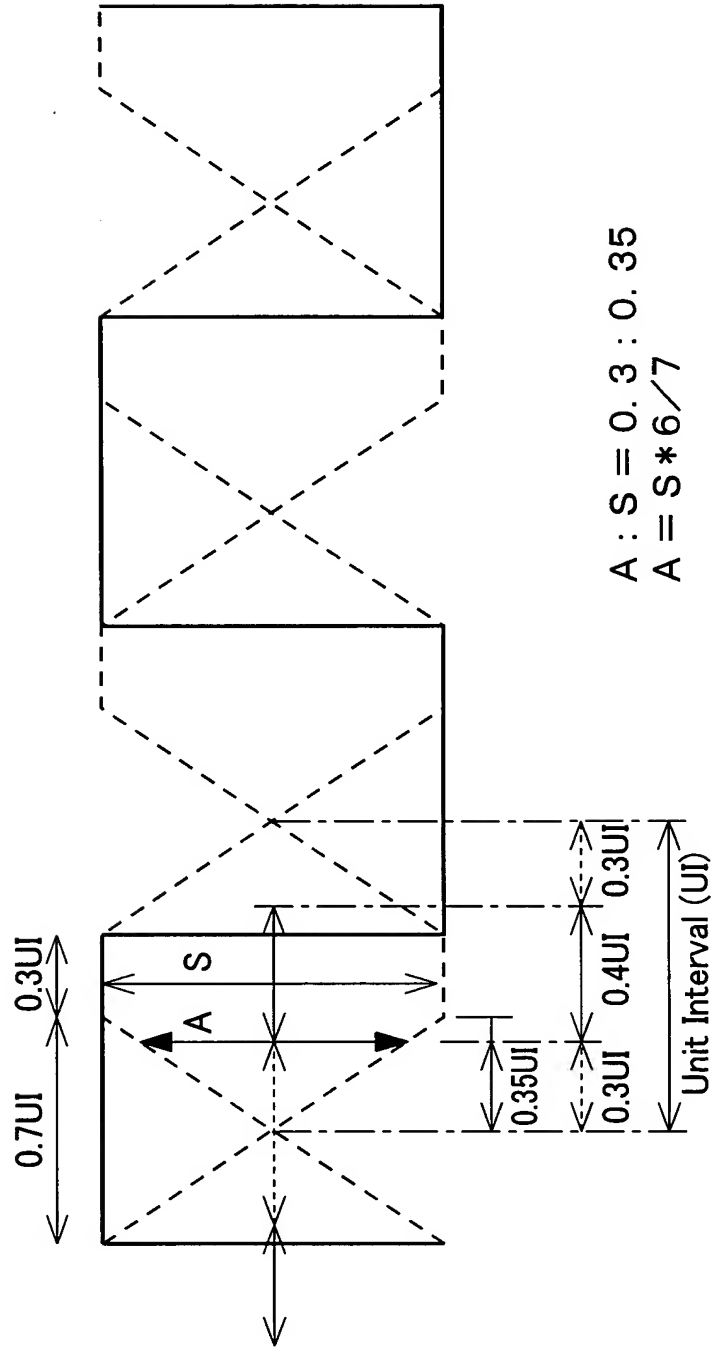


↔ EYE OPENING REQUIRED 0.4UI

↔ ACCEPTABLE JITTER PORTION 0.6UI

↑↓ SIGNAL AMPLITUDE "A" THAT MUST BE ENSURED AT MINIMUM

3/10

FIG. 3

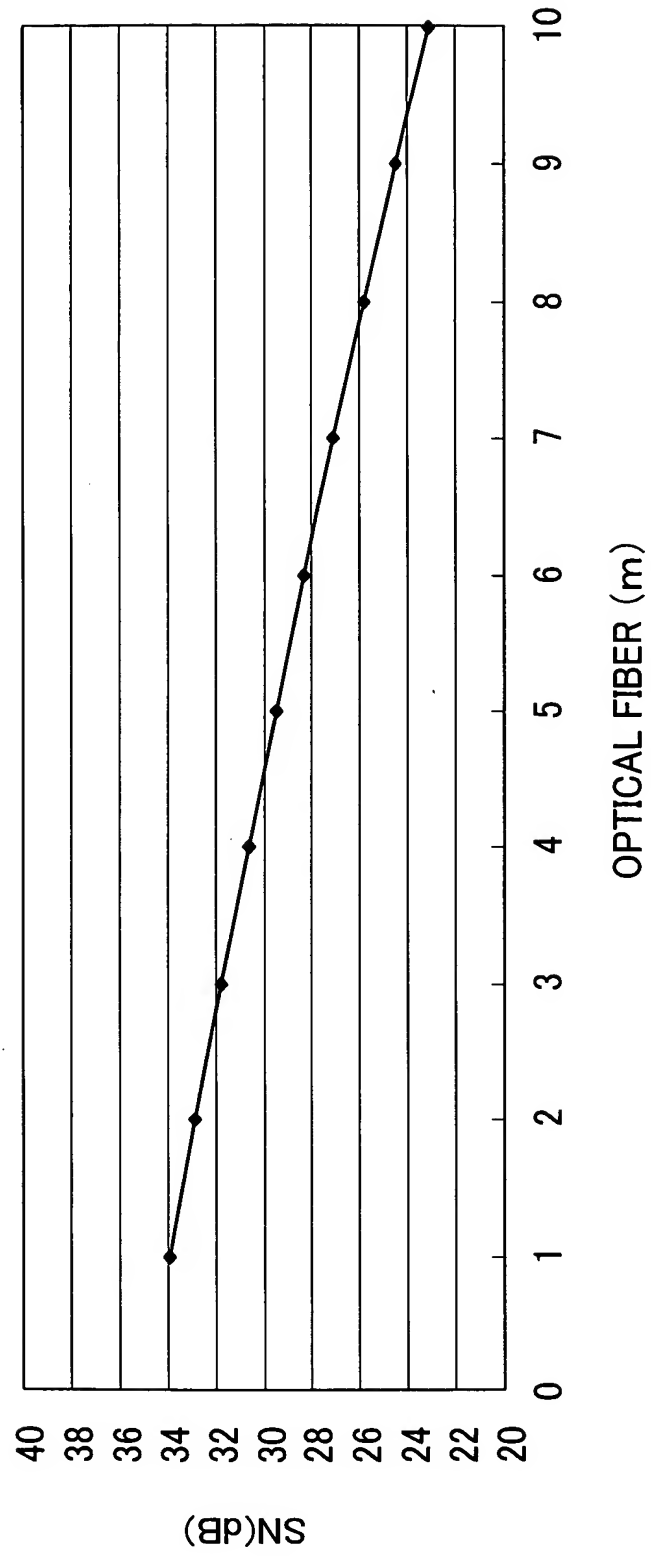

4/10

FIG. 4

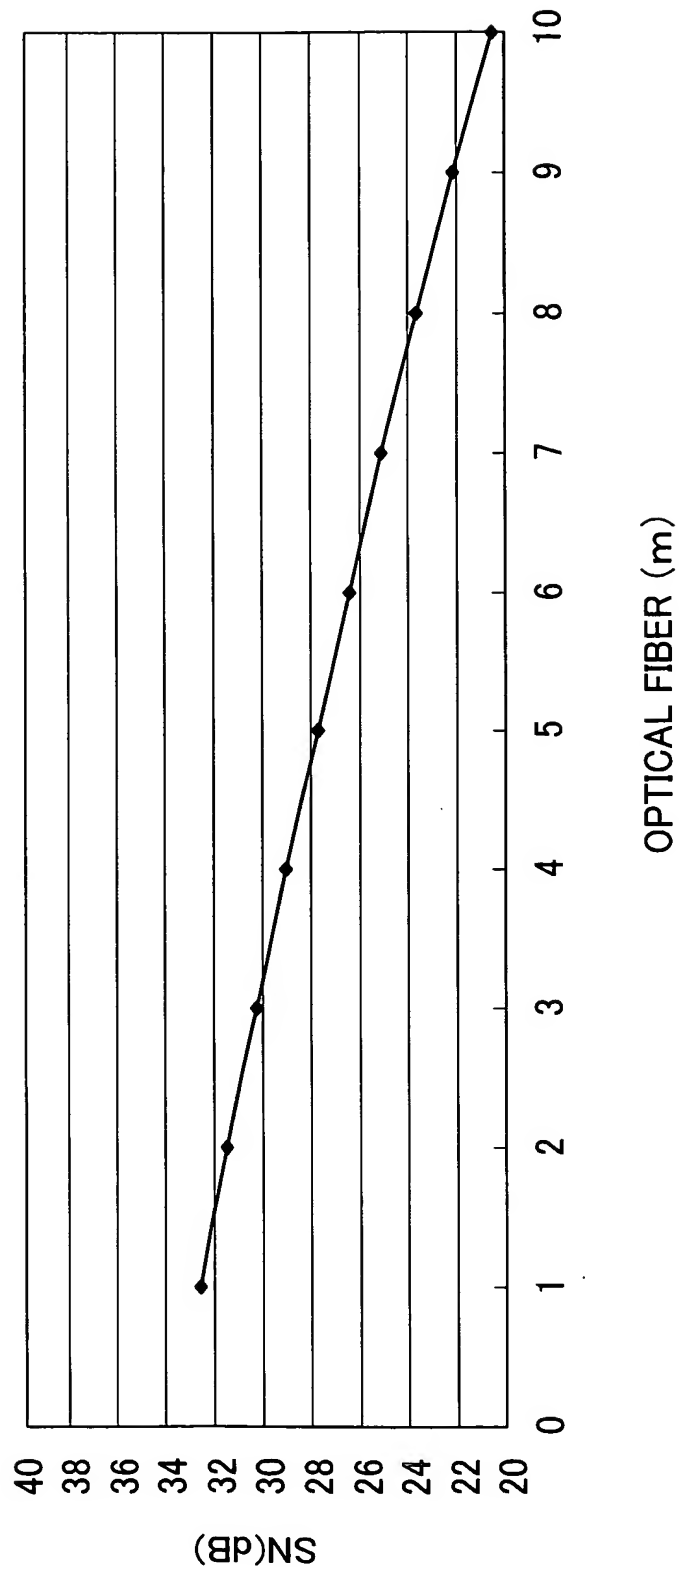


FIG. 5

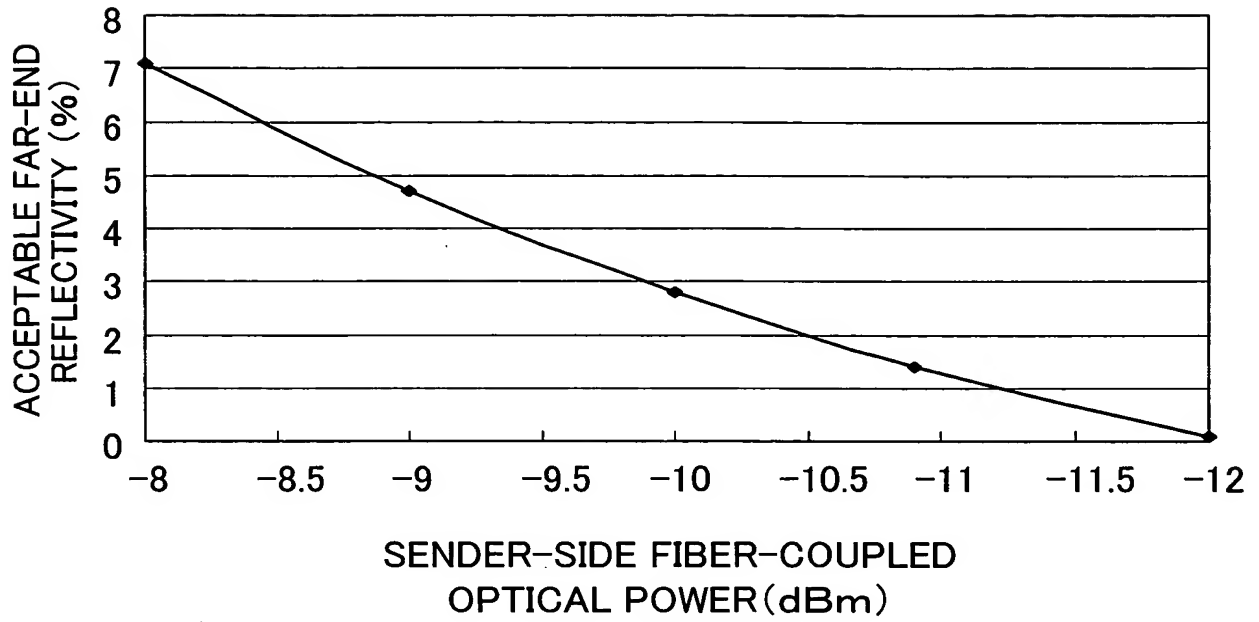


FIG. 6

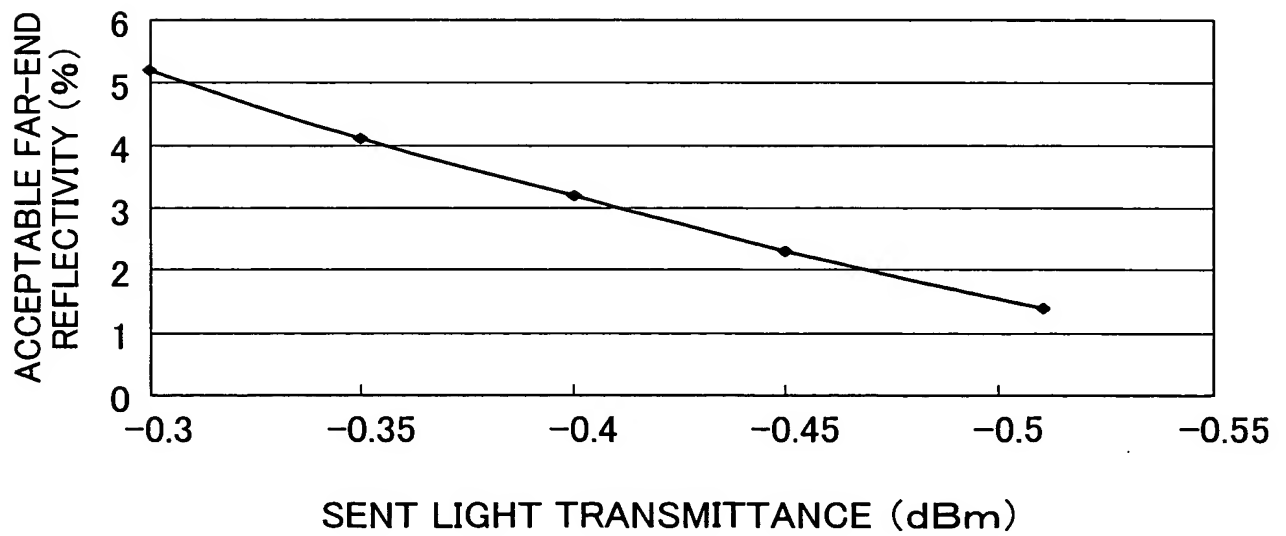


FIG. 7

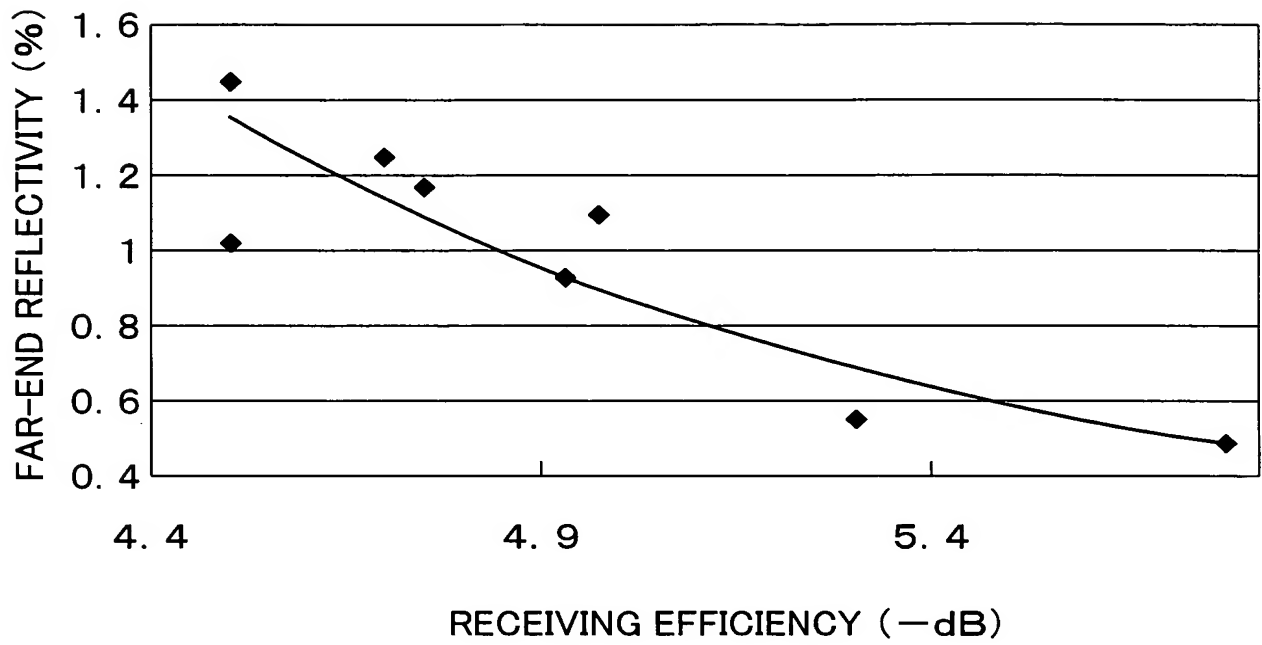


FIG. 8 (b)

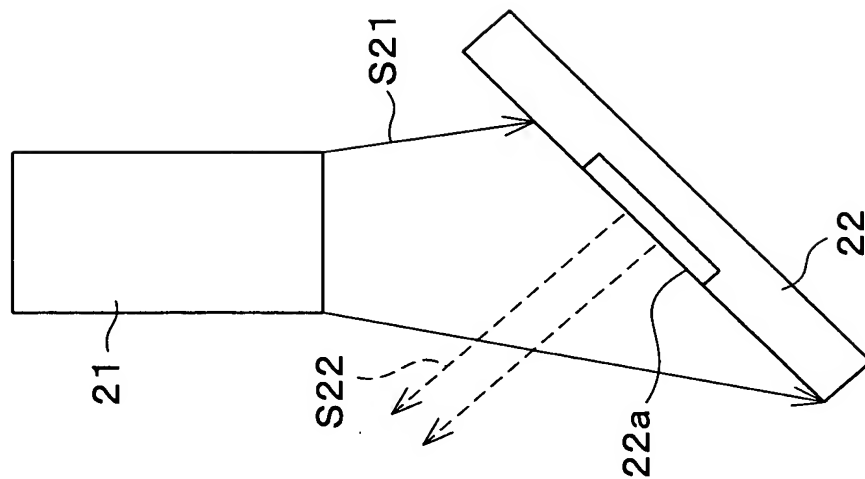


FIG. 8 (a)

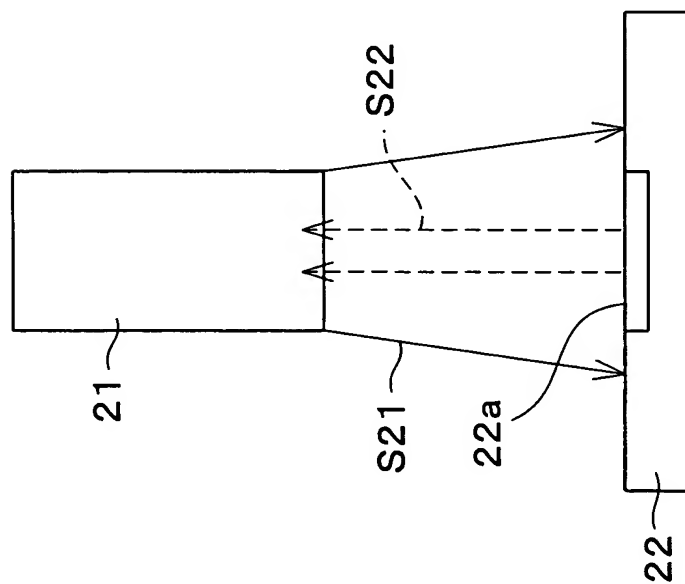


FIG. 9 (a)

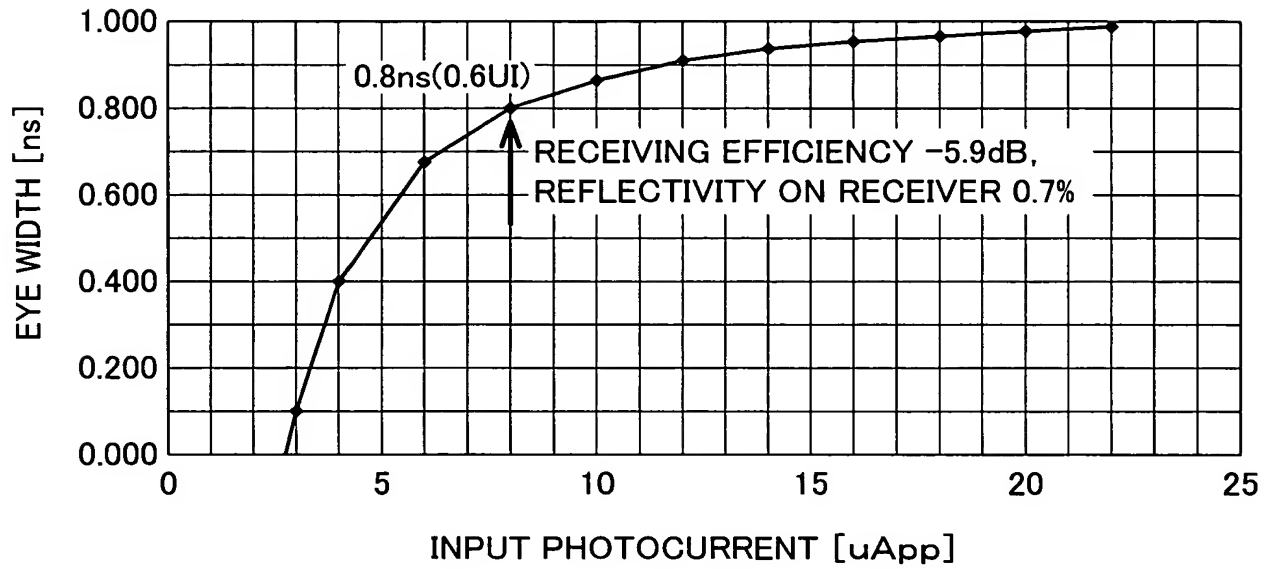


FIG. 9 (b)

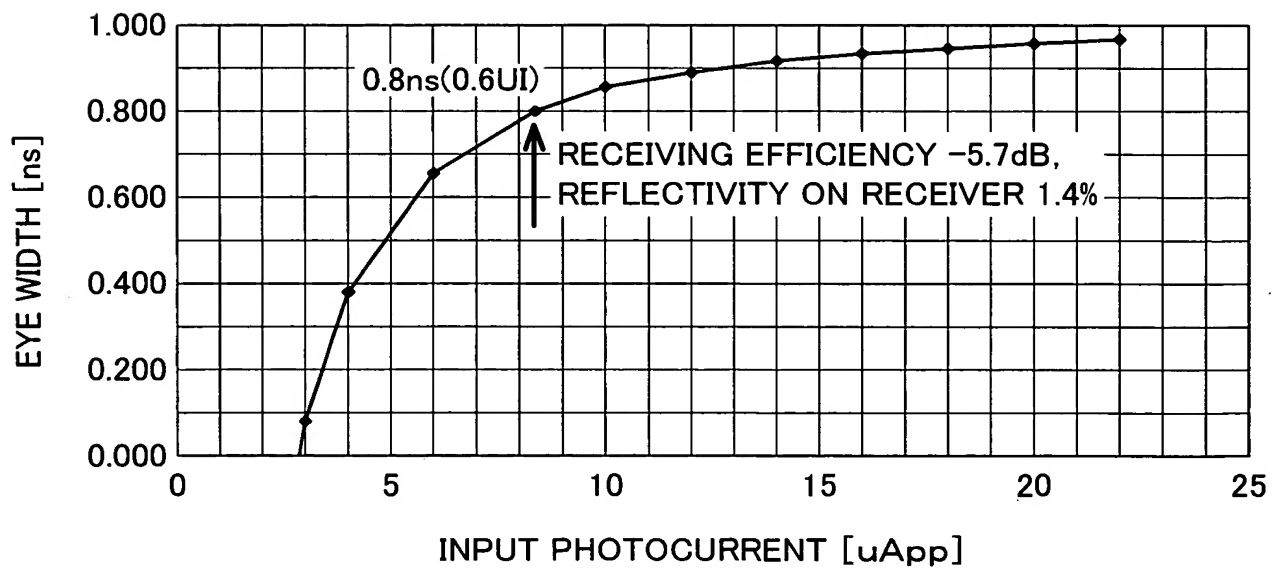




FIG. 10

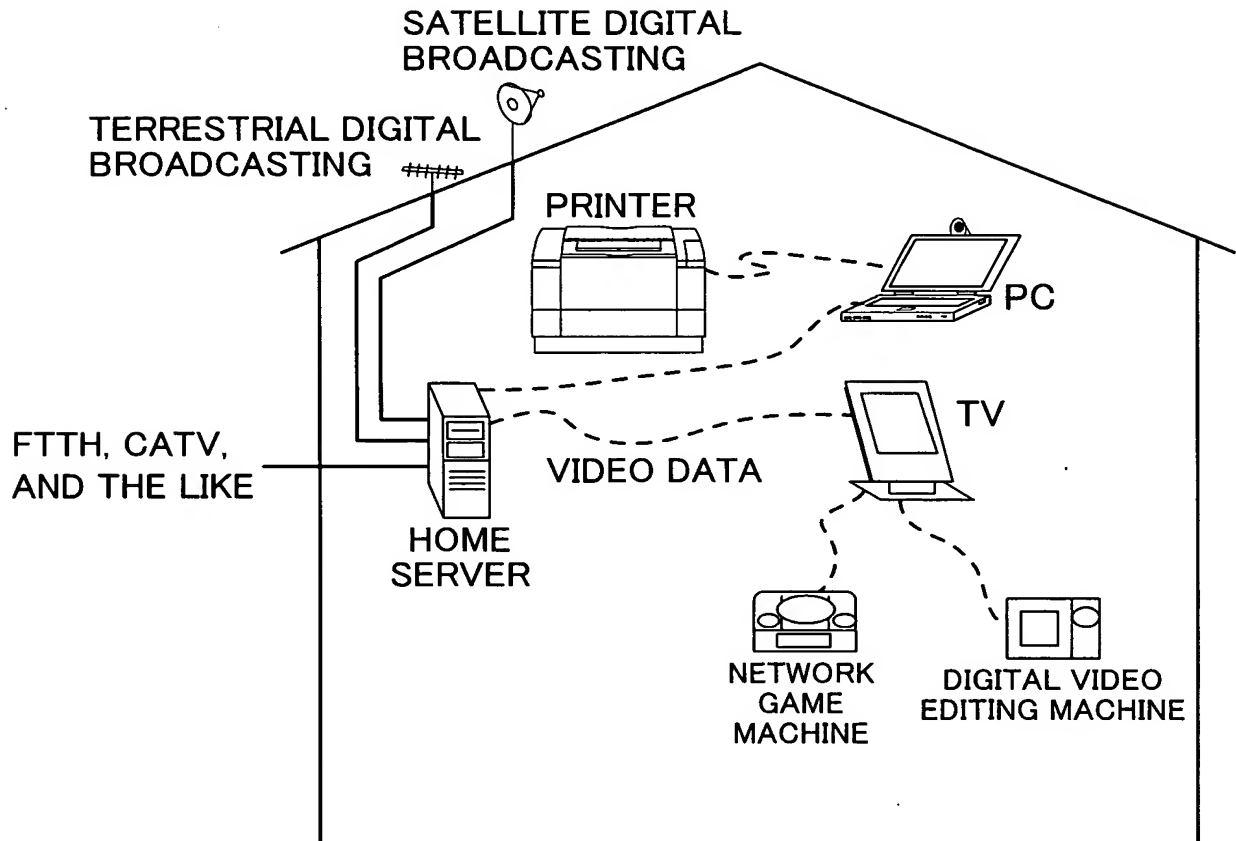


FIG. 11

